

USER MANUAL

COMPACT SERIES 26V LITHIUM ION BATTERY

Thank you for choosing our product, please read this manual carefully before operating and save it for future reference.

Features

- Can output 26V DC to power 26V device.
- The battery meets UN38.3 IATA safety regulation.
- Made of lithium-ion cells, no memory effect, eco-friendly.
- Five-level LED to check remaining capacity.
- Intelligent circuit inside to protect it from over-voltage, over-current, over-charge, over discharge, short circuit, high temp., etc.
- It offers the option of either a V-mount or a Gold mount.
- It features a 26V 10A D-tap and a 5V 2.1A USB-A port.

Technical Specification

Model	7S26VS
Voltage	25.2V
Capacity	257Wh
USB-A Output	5V 2.1A
BP Electrode Output	25.2V 15A(Max.)
Working temperature	0 - 40 °C
Weight	2.74lbs
Dimensions	4.73*3.59*3.55inches
Packing List	Charger*1 AC Power Cable*1 User Manual*1

Charge instructions

Charge through BP electrode terminals

- Professional 26V V-Mount charger is recommended to charge this battery

Charge through D-Tap ports

- Professional 26V D-tap charger is recommended to charge this battery through D-Tap.
- Please make sure to check the   polarity of D-Tap connector prior to plug-in.


Discharge instructions

- Recommend to operate in the temperature of 0~40°C.
- Press LED power check button to check remaining capacity during discharge.
- D-Tap outputs 26V up to 10A DC current.
- USB port supplies regulated 5V max. 2.1A current.

Disclaimer

The company shall have no responsibility or liability for property damage or injury caused by failure to follow the instructions in this manual.

Appearance

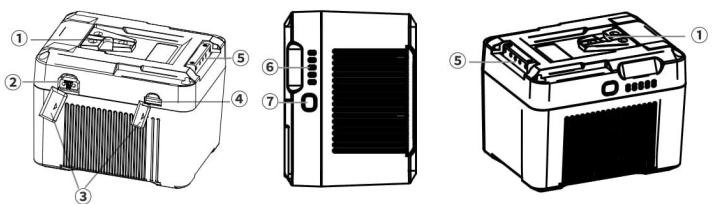

①. V Mount plate ②.D-TAP port ③. Dust cover ④.USB-A port
 ⑤. BP electrode terminals ⑥. LED indicators ⑦.Power check button

Waring

- Do not expose to temperature over 140°F/60°C.
- Keep away from fire.
- Do not immerse in water.
- Never open without permission.
- Use recommended charger only.
- Do not short the battery terminals.
- Avoid heavy hits.

Warranty

Warranty rules

- Warranty period is 2 years from the date of sale to the direct customers. Free repair is provided for battery with performance defects under normal use.

This warranty does not cover any problems related to the following:

- Damage caused by normal wear of parts, scratches, surface rust or deterioration.
- Damage caused by improper operating, abnormal use, improper storage, or lack of regular maintenance.
- Removed or altered product stickers or serial numbers which void our warranty.
- Product repaired, dismantled, or altered by unauthorized technical personnel.
- Products beyond the warranty period.
- Damage caused by force majeure (such as fire, flood, war, earthquake, snowstorm, etc.)