

YC-U70 YC-U98 LI-ION BATTERY PACK


USER MANUAL

Thank you for choosing our company's products, please read the instruction manual carefully before using this product, and keep it for future reference.

Features

- SONY BP-U65/U90 Compatible battery,
- Configure with 14.4V/3.5A D-tap output and 5V/2.1A USB power output,
- 4 LED display, indicating remaining capacity,
- High-performance rechargeable lithium-ion battery, no memory effect,
- Built-in multiple control circuits, multiple protection for temperature, voltage and current.

Appearance

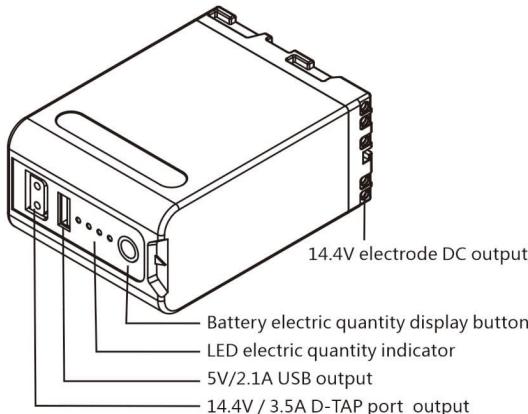

Specification parameters

Model	YC-U70	YC-U98
Voltage	14.4V	14.4V
Capacity	74Wh,5200mAh	100Wh,7000mAh
Output	Electrode port	14.4V 3.5A
	USB port	5V 2.1A
	D-TAP port	14.4V 3.5A
Dimensions	70 X 42 X 96mm	
Weight	430g	465g
Compatible cameras	SONY PXW-EX280 EX260 FS7 FS5 X280 Z280 Z190 EX1R EX3R X160 and other general and SONY U60 U30 series batteries	

Charge /Discharge instructions

Charge via the electrode port

It is recommended to use ROLUX RL-EXC2 charger to charge through the electrode interface.

Charge via the D-TAP port

It is recommended to use the ROLUX RL-T1A or YC-ZNC charger to charge through the D-TAP interface. When charging, please note that the positive and negative ends of the D-TAP port must not be reversed.

Discharge

It is recommended to use it within the temperature range of 0 ~ 40 °C to ensure the best performance of the battery, Four-segment LED displays remaining capacity, The D-TAP port outputs DC14.4V, with a maximum output of 50W When the battery is used on the camera, it can output 14.4V DC power supply to supply power for other devices at the camera end (such as news lights), Standard USB DC output 5V / 2.1A, and the maximum output is 10W.

WARNING

- Do not expose to temperature over 140°F/60°C.
- Keep dry, away from fire. Do not immerse in water.
- Never open without permission.
- Use recommended charger only.
- Do not short the battery terminals.
- Avoid heavy hits.

Warranty

Warranty rules

• Warranty period is 18 months from the date of sale to the direct customers. 7 days free return, 15 days free replacement, 18 months free repair is provided for battery with performance defects under normal use.

This warranty does not cover any problems related to the following:

- Damage caused by normal wear of parts, scratches, surface rust or deterioration.
- Damage caused by improper operating, abnormal use, improper storage, or lack of regular maintenance.
- Removed or altered product stickers or serial numbers which void our warranty.
- Product repaired, dismantled, or altered by unauthorized technical personnel.
- Products beyond the warranty period.
- Damage caused by force majeure (such as fire, flood, war, earthquake, snowstorm, etc.)

Disclaimer

Our company will not be responsible for any product damages or accidental damages from overheating or short circuit caused by use not in accordance with this manual.